

SOLUS Ultra™ European Vehicle Communication Software Activation Instructions

This document provides instructions for activating the European Vehicle Communication software on the SOLUS Ultra scan tool.

Before You Begin

Perform these preliminary actions before activating the European Vehicle Communication software:

- Power up the SOLUS Ultra scan tool with the AC/DC Power Supply.

IMPORTANT:

It is highly recommended that the SOLUS Ultra be powered by the AC/DC Power Supply during the procedure to avoid accidental power loss, which can severely damage the unit.

Activating the software

Use the procedure below to activate the European Vehicle Communication software:

**To activate the European Vehicle Communication software:**

1. Power off the SOLUS Ultra unit.
2. Gently push down on the program uSD card on top of the SOLUS Ultra unit to release it, then remove it from the tool.

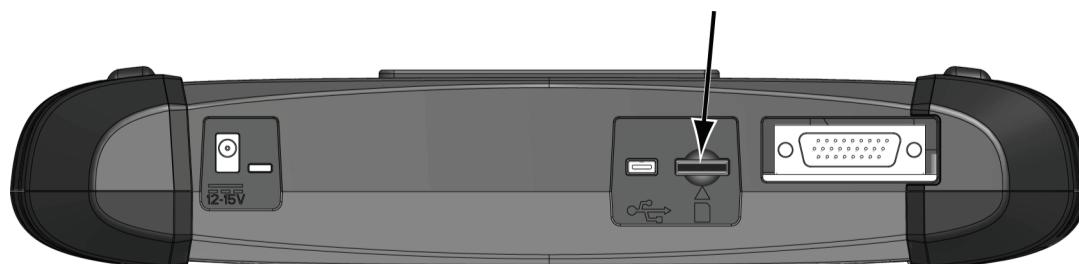


Figure 1 Sample uSD card location

3. Set the program uSD card aside in a safe place.
4. Fit the European Activation uSD card into the card slot on top of the SOLUS Ultra unit.

5. Power on the SOLUS Ultra unit.
A screen with “Install Euro Software?” should display.
6. Press **Y/✓** to continue, then follow the instructions that display on the screen.
7. Gently press to release the European Activation USD card, then remove it from the SOLUS Ultra unit.
8. Fit the program uSD card into the slot on the SOLUS Ultra, then push down to seat it.
9. Press **Y/✓** to continue.
The European software activates and a “software update complete” message displays.
10. Press **Y/✓** to shut down and restart SOLUS Ultra unit.
European manufacturers should now be included on the list when you select Scanner from the home page.
Store the European Activation USD card in a safe place.